

# Parallelism in LMDZ

A short survival guide for those who  
feel diagonally stuck in a parallel world

LMDZ course, December 12, 2024

# What is parallelism ?

- Simply based on dividing a task into many smaller ones handled separately but simultaneously among `workers'.
- e.g.: We want to translate the book '*Les Misérables*', (V. Hugo, 1862, 5 cap. More than 1500 pages)
  1. Assume we are all fluent in English and French
  2. We divide the book in blocks of equal number of pages
  3. Each one of us translates only his/her assigned pages **independently** of the others (except for possible borderline cases, e.g. a sentence starting at the end of a block and continuing in the next)
  4. The translation of the whole book is finished once everyone is finished
  5. There needs be some **organizer** who will **assign** tasks and be **collecting** all the translations to a single common final product.
- Parallel computing mimics this organisation.
- Making use of different cores, mainly with two paradigms: **distributed memory** and **shared memory**
- Technically, computations are spread over different **cores**.

## Why go parallel ?

- To have simulations run faster by **using multiple cores to share the workload**, each working “as independently as possible” (i.e.: with the minimum communication/interaction with the other cores).
- To benefit from modern architectures (from laptops to supercomputers).

## Which parallelism is implemented in LMDZ ?

- LMDZ is designed so that it can be compiled and run in serial (sequential) or parallel mode (in various forms, **MPI**, **OpenMP**, or **mixed MPI/OpenMP**, as will be discussed later).
- The implementation of the parallel modes has been thought of, and done (**Yann Meurdesoif**, LSCE, IPSL), so that it can easily benefit from all hardware platforms. The various aspects of parallelism in the code have moreover been coded as to be the least intrusive for users and developers.

# MPI and OpenMP parallelism paradigms


## MPI : Distributed Memory parallelism

- The code to be executed is replicated on all CPUs in as many processes.
- Each process runs independently and by default does not have access to the other processes' memory.
- Data is shared via a **message passing interface library** (OpenMPI, MPICH, etc.) which uses the **interconnection network of the machine**. Efficiency then essentially relies on the quality of the interconnection network. As a new set of subroutines and functions: CALL bcast, CALL gather, CALL scatter, ...
- The number of processes to use is chosen at runtime: `mpirun -n 8 gcm.e`

## OpenMP : Shared memory parallelism


- This parallelism is based on the principle of multithreading. Multiple tasks (threads) run concurrently within a process.
- Each task essentially has (shared) **access to the global memory** of the process.
- **Loops are parallelized using directives** (`!$OMP ...`, which are included in the source code where they appear as comments) **interpreted by the compiler**.
- The number of OpenMP threads to used is set via an environment variable `OMP_NUM_THREADS` (e.g.: `OMP_NUM_THREADS=4`)

## Hybrid MPI/OpenMP programming

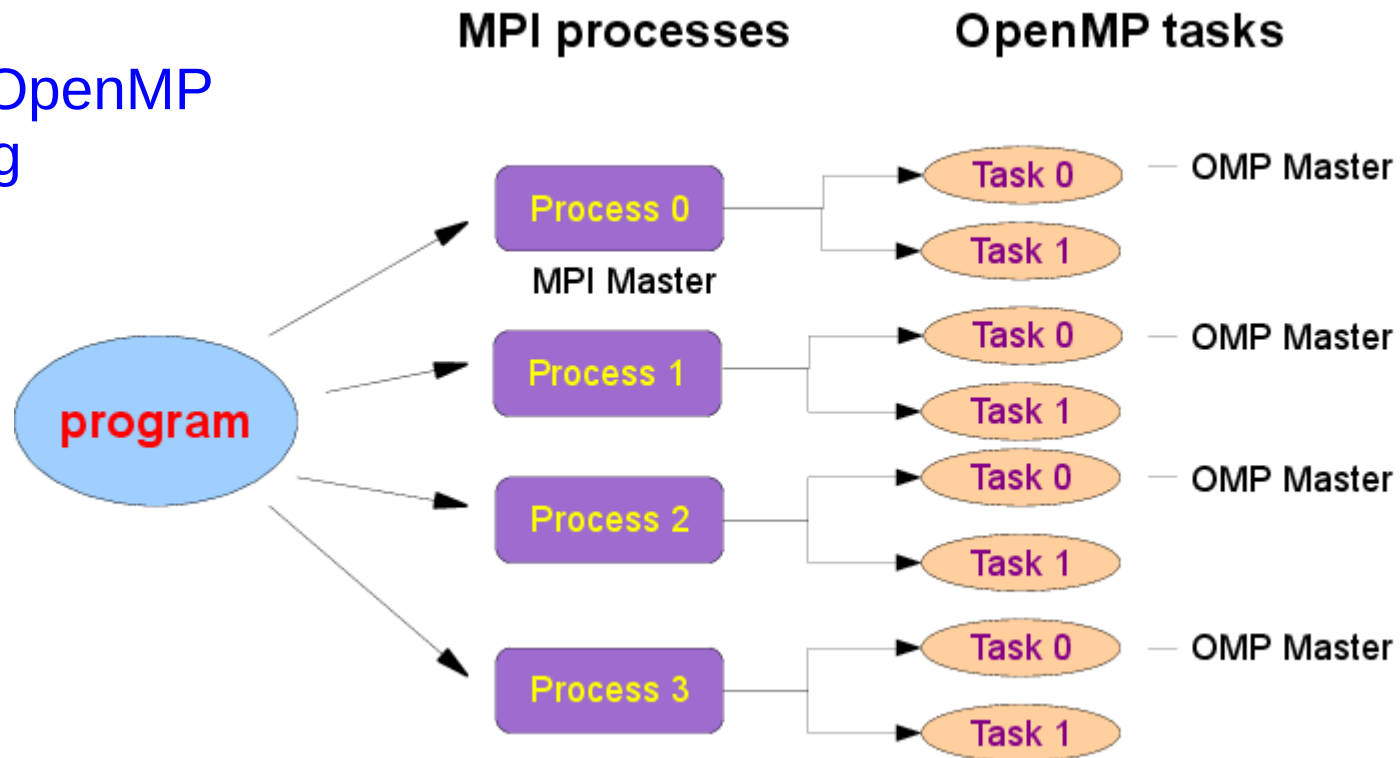

- **Each MPI process launches OpenMP threads** which have access to its global memory. (threads also have private memory for specific variables)
- In LMDZ, MPI and OpenMP are differently implemented to best fit requirements. The number of OpenMP threads per MPI process is fixed and remains the same throughout a simulation.
- No need to try to use more cores than available on your machine!

## Hybrid MPI/OpenMP programming

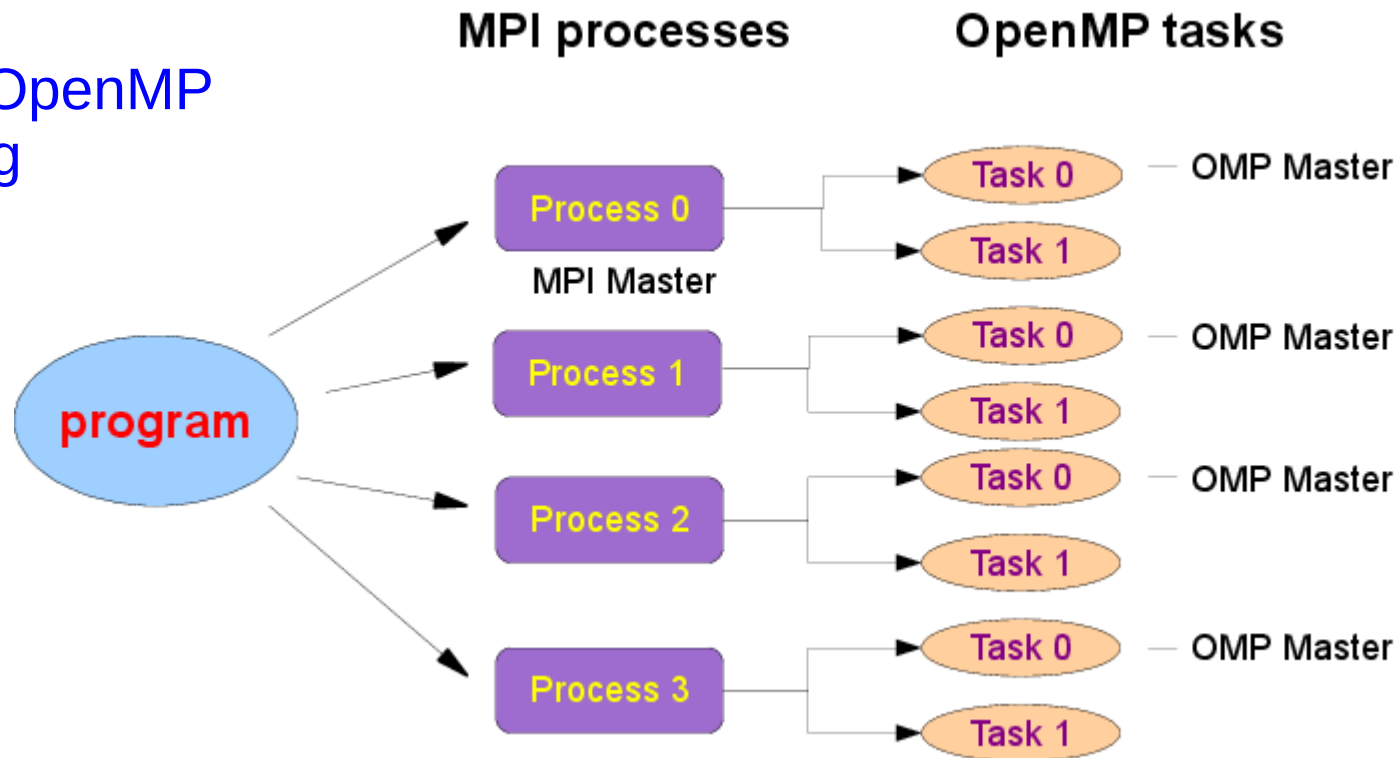

## Different parallelization approaches in the dynamics and physics


### ➤ In the dynamics

Significant interactions between neighbouring meshes, and therefore numerous cases of data exchange and synchronizations. The subtler part of the parallelism in the code..

### ➤ In the physics

There is **no interaction** between neighbouring columns of the atmosphere, which can easily be handled separately.


# Parallelism in the dynamics

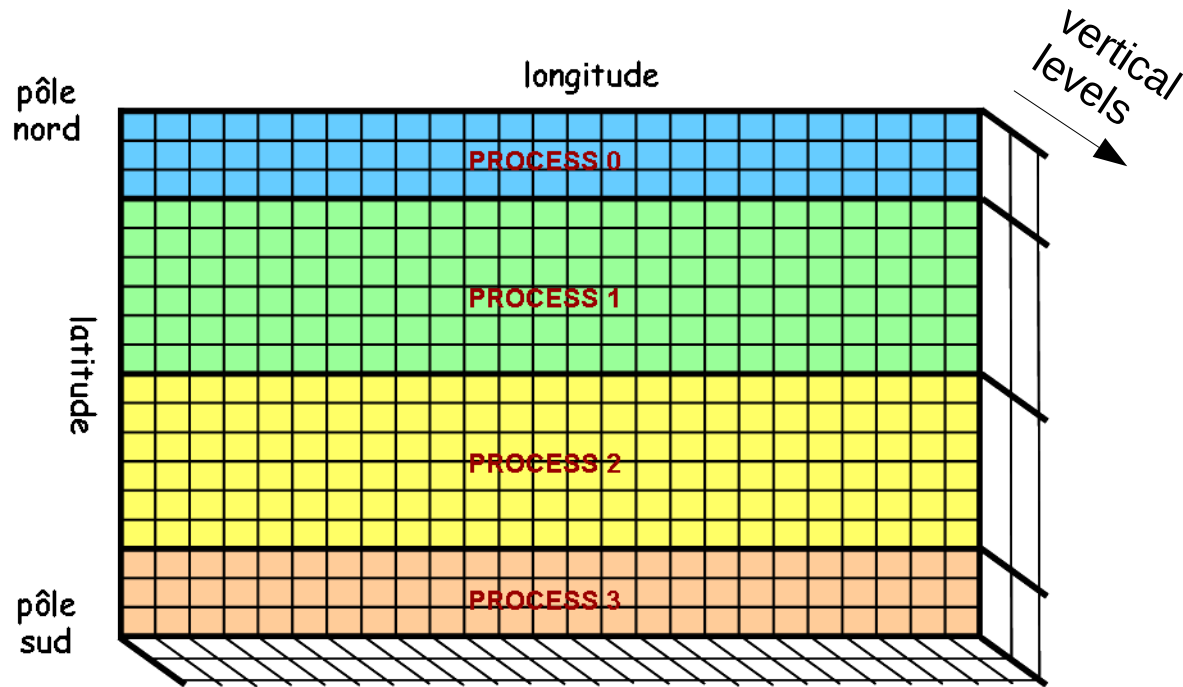

## => MPI tiling

- Tiling is by bands of latitude.
- A **minimum of 2 latitude bands per MPI process** is mandatory.
- But the work load is not the same for all latitudes (essentially because of the polar filter).
- Use option *adjust=y* (in *gcm.def*) to dynamically optimize (during the run) the band distribution of processes.
  - Run the GCM (in MPI mode only!) over at least a few thousand time steps to obtain a *Bands\_\*\*x\*\*x\*\*\_\*.prc.dat* file.
  - Re-run the simulation using option *adjust=n* (with the *Bands\_\** file in the run directory)  
*NB: if there is no Bands\_\* file, the GCM creates one with a uniform balance between processes*

# Parallelism in the dynamics

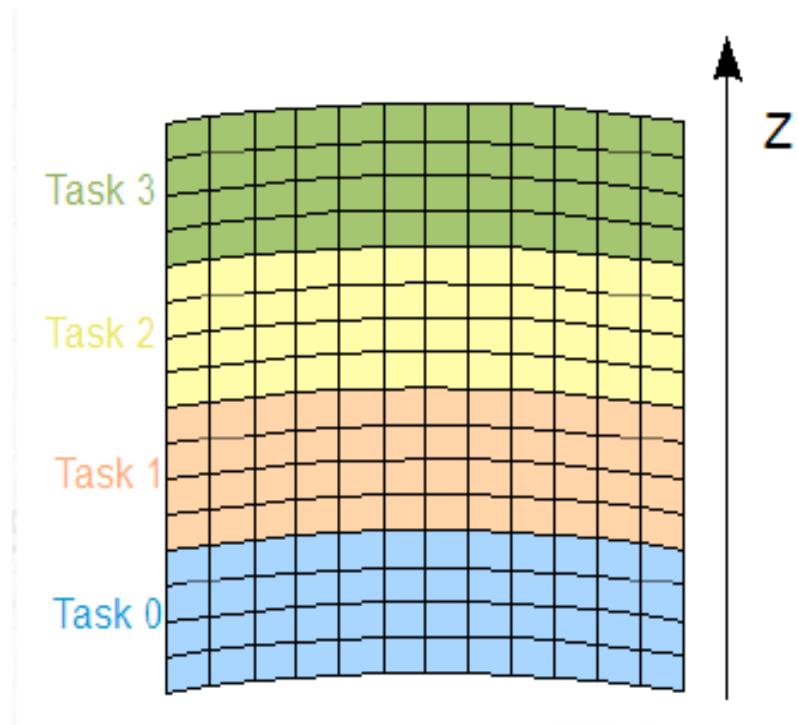


## => OpenMP splitting

- The split is done along the vertical levels only (the outermost loop in most computations).
- An estimate size of blocs to assign to each thread can be specified using option `omp_chunk=...` in `gcm.def`.
- In practice, target at least chunks of ~10 vertical levels for each OpenMP task (an optimal compromise, but which may depend on the machine on which the code is run).




# Parallelism in the physics

- The physics handles physical phenomena which interact within a single atmospheric column: radiation, convection boundary layer, etc.
- Individual columns of atmosphere **do not interact** with one another.
- The parallelization strategy is to **distribute the columns of atmosphere over all cores**.
- The physics grid : **klon\_glo** geographic points over **klev** vertical levels.  
First node (1) => North pole,  
last node (klon\_glo) => South pole.

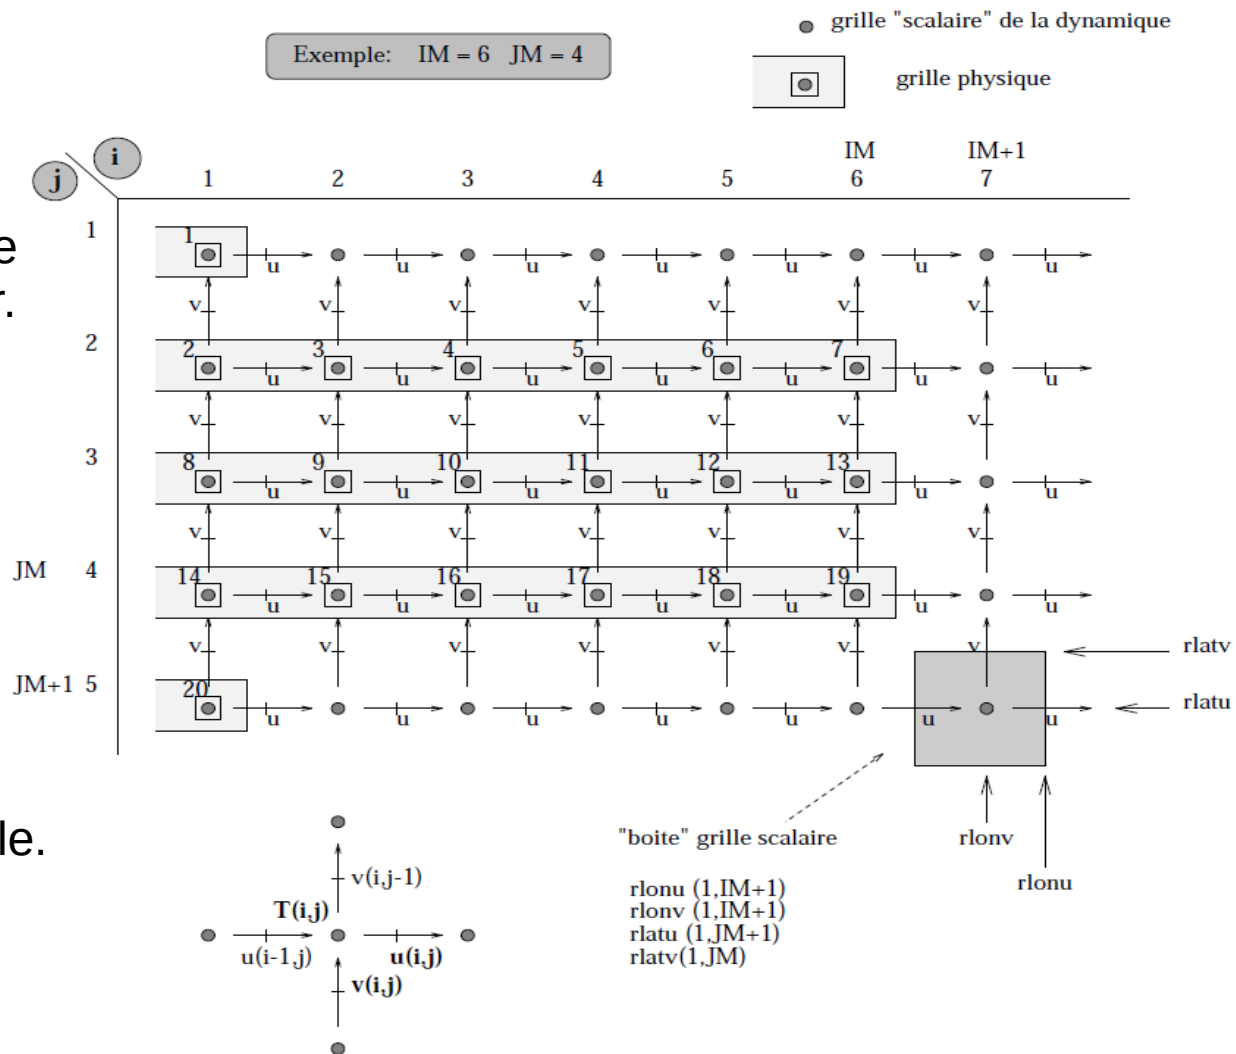

# Parallelism in the physics

- The columns from the global domain are first distributed among the MPI processes.
  - The global domain :  $k_{lon\_glo}$  columns of atmosphere
- The columns of each MPI domain are assigned to the OpenMP tasks assigned to the that process :
  - In each MPI domain :  $k_{lon\_mpi}$  columns :  $\sum k_{lon\_mpi} = k_{lon\_glo}$
  - In each OpenMP domain :  $k_{lon\_omp}$  columns :  $\sum k_{lon\_omp} = k_{lon\_mpi}$
- In practice, the size of the local domain  $k_{lon}$  is **an alias** of  $k_{lon\_omp}$  (so as to behave exactly as when running the serial code).
  - Never forget that  $k_{lon}$  varies from one core to another.

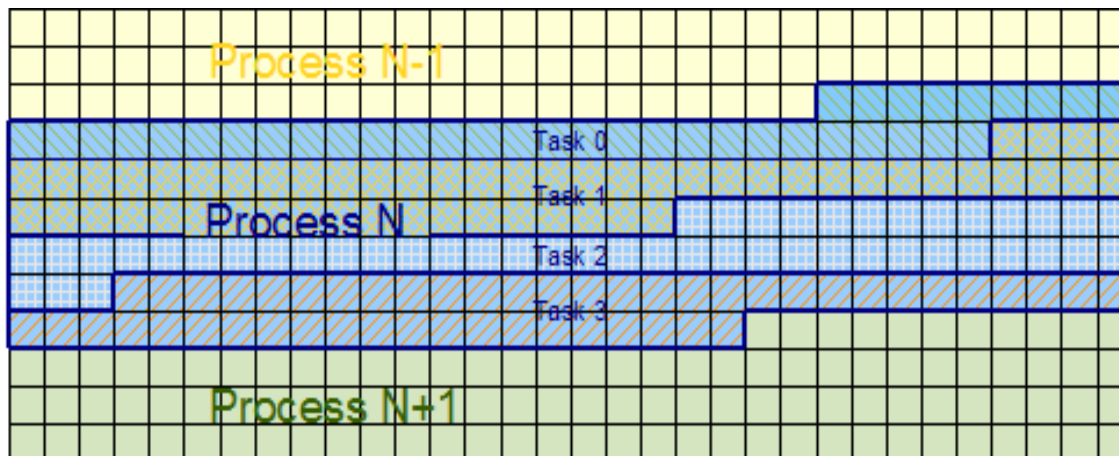

# Time for an illustrative and interactive example

**N.B: There is a dedicated Tutorial about installing and using LMDZ in parallel**

# Some LMDZ code linked to parallelism

## Different parallelism control parameters:

- klon\_glo, nbp\_lon, nbp\_lat, nbp\_lev
- klon\_mpi , klon\_mpi\_begin, klon\_mpi\_end, ii\_begin, ii\_end, jj\_begin, jj\_end, jj\_nb, is\_north\_pole, is\_south\_pole, is\_mpi\_root, mpi\_rank, mpi\_size
- klon\_omp, klon\_omp\_begin, klon\_omp\_end, is\_omp\_root, omp\_size, omp\_rank

## Some general considerations in physics:

- For openMP, declare all SAVE variables as:  
REAL, SAVE :: save\_var  
!\$OMP THREADPRIVATE(save\_var)
- Allocation of variables with `klon' (real size within each core)  
ALLOCATE (myvar(klon))
- Neither North or Pole grid points are:  
myvar(1) or myvar(klon)

## Data transferts:

- The transfer interfaces handle data of all the basic types : REAL, INTEGER, LOGICAL, CHARACTER(only for broadcast)
- The transfer interfaces moreover can handle fields of 1 to 4 dimensions

# Data transfer in the physics (examples)

**Broadcast** : the master process duplicates its data to all processes and tasks.

Independently of the variable's dimensions

CALL bcast(var)

**Scatter** : the master task has a field on the global grid (klon\_glo) which is to be scattered to the local grids (klon).

The first dimension of the global field must be **klon\_glo**, and the one of the local field must be **klon**

CALL scatter(field\_glo,field\_loc)



**Scatter2D** : same as Scatter except that the global field is defined on a 2D grid of : **nbp\_lon** x **nbp\_lat**.


The first and second dimensions of the global field must be (**nbp\_lon**,**nbp\_lat**), and the first dimension of the local field must be **klon**

CALL scatter2D(field2D\_glo,field1D\_loc)

Gather : a field defined on the local grids (klon) is gathered on the global grid of the master process (klon\_glo).

The first dimension of the global field must be klon\_glo, and the one of the local field must be klon

CALL gather(field\_loc,field\_glo)

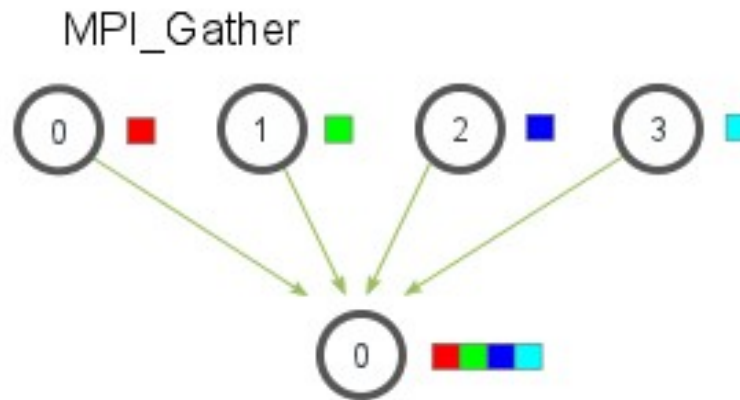

Gather2D : gather data on the 2D grid of the master process.

CALL gather2D(Field1D\_loc,Field2D\_glo)

## Illustrative example of load data from a file, (simplified) extracted from phylmd/read\_map2D.F90

```
USE dimphy
USE netcdf
USE mod_grid_phy_lmdz
USE mod_phys_lmdz_para
...

REAL, DIMENSION(nbp_lon,nbp_lat) :: var_glo2D ! On the global 2D grid
REAL, DIMENSION(klon_glo)        :: var_glo1D ! On the global 1D grid
REAL, DIMENSION(klon)            :: varout    ! On the local 1D grid

! Read variable from file. Done by master process MPI and master thread OpenMP
  IF (is_mpi_root .AND. is_omp_root) THEN
    NF90_OPEN(filename, NF90_NOWRITE, nid)
    NF90_INQ_VARID(nid, varname, nvarid)

    start=(/1,1,timestep/)
    count=(/nbp_lon,nbp_lat,1/)
    NF90_GET_VAR(nid, nvarid, var_glo2D,start,count)
    NF90_CLOSE(nid)

    ! Transform the global field from 2D to 1D
    CALL grid2Dto1D_glo(var_glo2D,var_glo1D)
  ENDIF

! Scatter global 1D variable to all processes
  CALL scatter(var_glo1D, varout)
```

# Writing output IOIPSL files and rebuilding the results

- Each MPI process writes data for its domain in a distinct file. One thus obtains as many files `histmth_00XX.nc` files as processes were used for the simulation.
- The domain concerned by a given IOIPSL file is defined with a call to `histbeg`, which is encapsulated in `histbeg_phy` (module `iophy.F`).
- Data is gathered on the master (rank 0) OpenMP task for each process. Each MPI process then calls the IOIPSL routine `histwrite`, which is encapsulated in `histwrite_phy` (module `iophy.F`).
- **Warning:** what is mentioned above is only true for **outputs in the physics**; it is also possible to make some outputs in the dynamics (triggered via `ok_dyn_ins` and `ok_dyn_ave` in `run.def`), but for these, **data is moreover gathered on the master process** so that there is only one file on output (which is a major bottleneck, performance-wise) => should only be used for debugging.



# Writing output IOIPSL files and rebuilding the results

Once the simulation finished, one must gather the data in a single file. This requires using the rebuild utility:

```
rebuild -o histmth.nc histmth_00*.nc
```

- **rebuild** is a utility distributed with IOIPSL  
See « WhatIs: the IOIPSL library » on LMDZPedia  
<https://lmdz-forge.lmd.jussieu.fr/mediawiki/LMDZPedia>
- If using the **install\_lmdz.sh** script then the **rebuild** utility is automatically built and placed in the “modipsl/bin” subdirectory; Look at script **reb.sh** in the BENCH32x32x39 test case:

```
modipsl=`pwd | sed -n -e 's/modipsl.*$/modipsl/p`  
file=$1  
  
...  
  
$modipsl/bin/rebuild -o $file.nc ${file}_0*.nc  
if [ -f $file.nc ] ; then rm -f ${file}_0*.nc ; fi
```

# The XIOS library (there is a dedicated tutorial)

- Next generation of the output library (IOIPSL not upgraded any more, will become depreciated).

<https://forge.ipsl.jussieu.fr/ioserver>

- Having installed the XIOS library (reference versions on global IPSL account on Ada and Curie), compile LMDZ using the “-io xios” option:

```
makecmdz_fcm -arch somearch -parallel [mpi|mpi_omp] -io xios .....
```

- Output is managed via `xml' files
- Set flag “ok\_all\_xml=y” (or equivalently “ok\_all\_xml=true”) in `run.def` in order to control the outputs in the X\*\*.nc files.
- With XIOS, output files can be generated as single files (no need to rebuild output files), by setting type=”one\_file” par\_access=”collective” parameters in the attributes of the “file” definition in the xml:

```
<file_definition type=”one_file” par_access=”collective” .....
```

# To summarize

- ▶ In the physics, as long as there is no communication between columns, you can develop and modify code “as if in serial”. Only mandatory requirement (for OpenMP): **variables which have a SAVE attribute have to be declared as !\$OMP THREADPRIVATE.**
  - Do take the time to **check the correct integration of modifications!** Results should be identical (bitwise) when the number of processes or OpenMP threads is changed (at least when compiling in 'debug' mode).
- ▶ In the dynamics, parallelism is much more intrinsic; one should really take the time to understand the whole system before modifying any line of code.
- ▶ **One can compile in any of the following parallel modes: mpi, omp or mpi\_omp**  
makeImdz\_fcm -parallel [mpi|omp|mpi\_omp] .....
- ▶ A run should use as many cores as possible, without forgetting that the **maximum number of MPI processes = number of nodes along the latitude / 2** and that it is usually best to use **1 OpenMP task for every ~10 points along the vertical.**
- ▶ To optimize the workload among X MPI processes, run a first month with *adjust=y* in run.def. And then use the obtained **bands\_resol\_Xprc.dat** files for the following simulations.

# Mixed bag of thoughts, advice and comments

- **To run on a « local » machine** (typically a multicore laptop):
  - An MPI library must be installed, and the « arch » files must be correspondingly modified to compile the model: `'makeImdz_fcm -arch local ...'`
  - It is always best to be able to use as much memory as possible:  
`ulimit -s unlimited`
  - It is also important to reserve enough private memory for OpenMP tasks:  
`export OMP_STACKSIZE=200M`
  - Use `'mpirun -np n ...'` to run with `n` MPI processes,  
and `'export OMP_NUM_THREADS=m'` to use `m` OpenMP tasks
  - Some examples and advice are given in [LMDZPedia](#): search for “parallel” or “MPI” or “OpenMP” ...  
=> <https://lmdz-forge.lmd.jussieu.fr/mediawiki/LMDZPedia>
- **To run on clusters** (MESOIPSL, aka Spirit, ...) **and machines of national supercomputing centres** (IDRIS, TGCC, CINES..):
  - Check the centre's documentation to see how to specify the number of MPI processes, OpenMP tasks, local limitations (memory, maximum run time) for [batch submission of jobs](#), etc.
  - Ask your favourite IPSL colleagues for some advice and their job headers on these machines.